

Part Modeler 2014 - Language Availability

SURFCAM Part Modeler 2014 is available in 10 languages:

- English
- Czech
- Dutch
- German
- French
- Italian
- Japanese
- Polish
- Spanish
- Taiwanese

QuickStart Guide
SURFCAM Part Modeler 2014 R2



Installing SURFCAM Part Modeler 2014

1. Insert the **Part Modeler DVD**. The installer will start automatically. (If Autorun is disabled, start the installation manually by running the **StartHere.hta** program found on the Part Modeler DVD.)
2. Select **Install SURFCAM Part Modeler** and the InstallShield Wizard will provide a guide through the installation process.
3. Follow the prompts on the next few screens and set the **Installation Settings** accordingly.
4. Now that the Installation Settings have been set, select **Install** and the **Part Modeler** software installation process will begin.
5. Once the **InstallShield Wizard** completes the installation process, select **Finish** to close the wizard. **SURFCAM Part Modeler** is now installed.

Note: The **CLS License Manager** which is required to obtain and run the license for **Part Modeler**, is installed automatically during the above installation process.


Generating a CLS Lock Code

Once **SURFCAM Part Modeler** is installed, a custom **Lock Code** is required to be generated for the system so that a CLS License may be issued. A CLS license may be issued as either a **Keyed** (SIM) license or a **Keyless** (Node Locked) license. With multiple systems, it is important that an individual **Lock Code** be generated for each system. These Lock Codes must be generated from the specific computer where the license will be installed. If the Lock Codes are being generated for **Keyed** licenses, then the correct SIM must be plugged in during the Lock Code generation process.

Note: All systems currently using a Keyed SIM **MUST** generate a **Lock Code** to be used with a **Keyed** license.

1. Navigate to:
64bit - (C:\Program Files (x86)\Common Files\Planit\2014.10\Utilities\Generate Lock Code)
32bit - (C:\Program Files\Common Files\Planit\2014.10\Utilities\Generate Lock Code)
Then double-click the  **GenerateLockCode.exe**
2. When the **Generate Lock Code** dialog opens make sure that the proper Lock Code is displayed for your application. A **Keyed** Lock Code will start with a **100-*** while a **Keyless** Lock Code will start with a **14-***. Once confirmed that the Lock Code prefix is correct, click the  **Save** button and save the generated **ECLockCode.dat** file.

Keyed



Generate Lock Code

Hostname: [text box]


Locking Method: Security Key 10

Lock code: 100-* [text box]

Lock to Security Key

OK

Keyless



Generate Lock Code

Hostname: [text box]

Locking Method: Keyless

Lock code: 14-* [text box]

Lock to Security Key

OK

3. Attach the **ECLockCode.dat** file to an e-mail and send it to your SURFCAM Reseller or Support Representative. A CLS License file for your SURFCAM Part Modeler system will be provided.

Installing a CLS License

The CLS License file is required to be installed before SURFCAM Part Modeler will function as a licensed version.

Keyed - A Keyed CLS License must be installed to both the SIM and any computer that the SIM will be used on.


Keyless - A Keyless CLS License must be installed on the same computer that was used to generate the lock code.

Network - For Network Licenses please contact your SURFCAM Reseller or Support Representative for more information.

1. You will receive an e-mail from your Reseller or Support Representative which contains your **New CLS License** file. Save this CLS License file to your computer.
2. Right-click on the  **CLS 2014** icon found in the **System Tray** in the lower right corner of the desktop and select **License Manager** from the popup menu. If the CLS icon is not visible, expand the System Tray by clicking on the **Show Hidden Icons** button.



3. When the **License Manager** opens, make sure that **Standalone** is selected, and then press the **Install License** button.

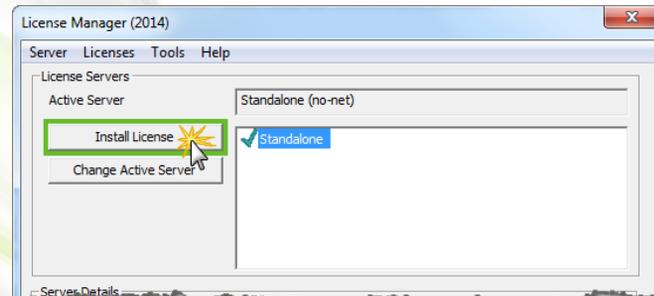

4. From the **Select License** dialog, choose **Use License**, click on the  **Navigate** button to locate and select the license file that you saved to your computer and then press **Next**.
5. When the **Confirm License Installation** dialog opens, select **Finish** to complete your license file installation.

SURFCAM Part Modeler is now licensed and ready to use!